




ZL 2017 2 1153882.0

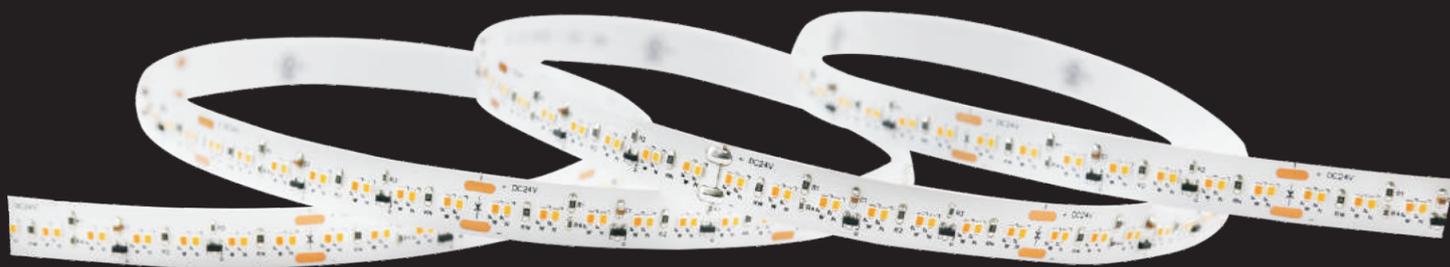

Features

- Dim to warm technology, color temperature warms as it dims
- Support of LEVITON triac dimmers or PWM function dimmers
- No controllers or receivers needed
- Cuttable every 14 LEDs
- Intelligent design to meet different environment and moods
- 3M double sided tape for easy installation
- cULus Listed, 5 years warranty

Application

Typically used for residential and hospitality.

Installation

Stick with 3M self adhesive tape.

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
Mail: sales@blueviewled.com Web.: www.blueviewled.com
Add: No.1000, Section 2, 2nd Konggang Road, Southwest
Aviation Industrial Development Zone, Chengdu, Sichuan, China.
Zip code: 610207


Specifications are subject to change without notice.
©Blueview™ 2018- All rights reserved. Made in China.

Specifications

Model No.	PTW-2016A-224-24-WN
Color Temperature (K)	1900-6500
Power (W/m)	11.52
Beam Angle	120°
Luminous Flux (Lm)	≤1000
Ra	≥90
Current (mA/m)	480
Light Color	White, Warm White
Voltage(V)	24
Max Run(M)	4 meters single ended
Working Temperature	-25~+60°C
Storage Temperature	-25~+70°C

Drawing

Unit:mm



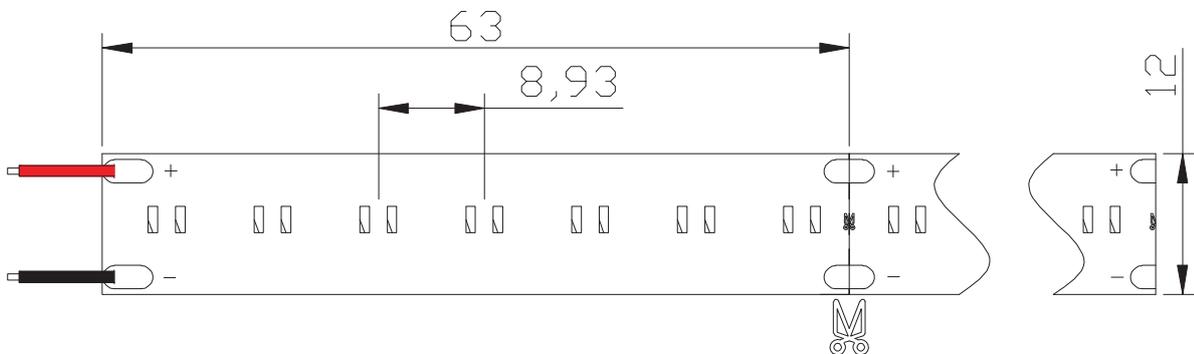


BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
 Mail: sales@blueviewled.com Web.: www.blueviewled.com
 Add: No.1000, Section 2, 2nd Konggang Road, Southwest
 Aviation Industrial Development Zone, Chengdu,Sichuan, China.
 Zip code: 610207

Specifications are subject to change without notice.
 ©Blueview™ 2018– All rights reserved. Made in China.


Dimming

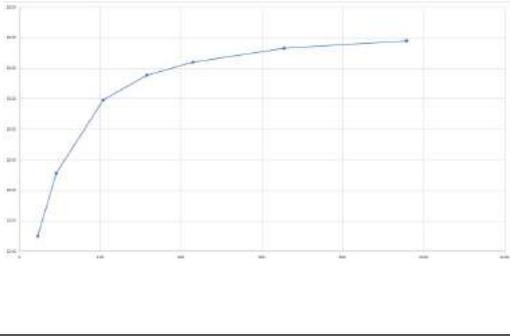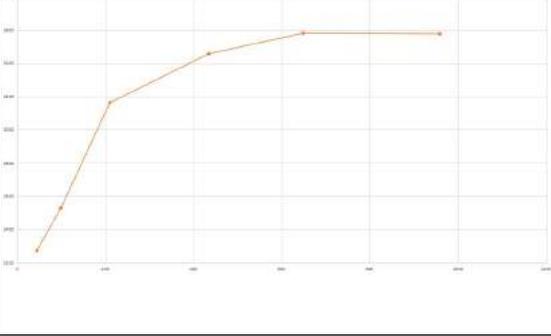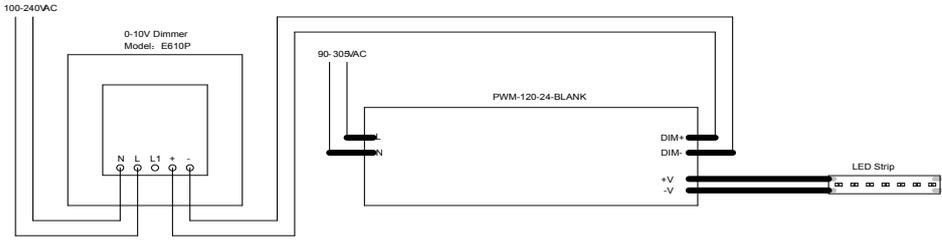Spec.	PTW	
	PTW05	PTW15
Principle	PWM	PWM
Method	Power supply with PWM signal (Output frequency: 450-550Hz)	Power supply with PWM signal (Output frequency: 1400-1600Hz)
	PWM controller (Output frequency: 450-550Hz)	PWM controller (Output frequency: 1400-1600Hz)
Dimming Curve	500HZ 	1000HZ 
		
Model No.	BV-FL-2016 (YL) – PTW05-24-224-12mm	BV-FL-2016 (YL) – PTW15-24-224-12mm

Packaging

Roll strip on a reel, then put together with desiccant into static shielding bag

Seal and label the bag

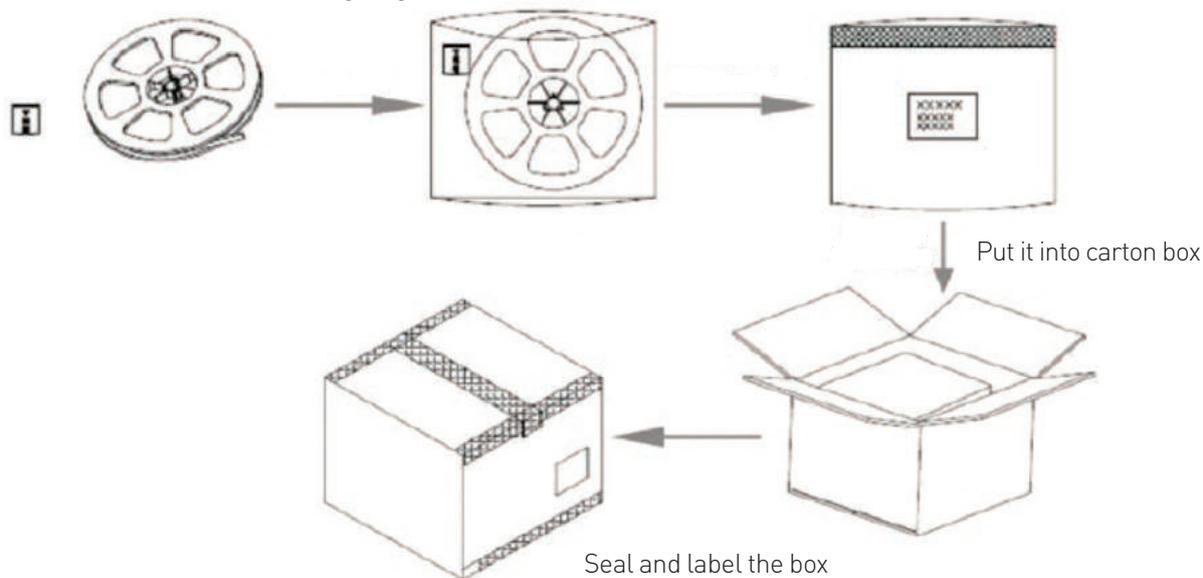

Packaging Information:

Packaging material: Static shielding bag and carton box

Shipping Dimension: 550*400*340

Model No.	Product Size (mm)	Reels per Box (pcs)	Quantity (pcs)	Net Weight (kg)	Gross Weight(kg)
PTW-2016A-224-24-WN	5M*12mm	100	100	8.6(1±10%)	13.6(1±10%)

The above quantity and weight are only for the illustrated packaging method.
There will be differences in the quantity and weight with other packaging methods.

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
 Mail: sales@blueviewled.com Web.: www.blueviewled.com
 Add: No.1000, Section 2, 2nd Konggang Road, Southwest
 Aviation Industrial Development Zone, Chengdu, Sichuan, China.
 Zip code: 610207

Specifications are subject to change without notice.
 ©Blueview™ 2018- All rights reserved. Made in China.