



One BIN only
for a CCT range



Lifetime



Certified



Certified



Warranty



Ra Available IP Grade Available //



Features //

- Dim to warm function, CCT & brightness dim at the same time
- Comply with voltage dimmable drivers.
- No controllers or receivers needed.
- Cuttable every 16 LEDs
- Intelligent design to meet different environment and moods
- 3M double sided tape for easy installation
- cULus Listed, 5 years warranty


Specifications //

LED Type	2016	Dimmable	Yes
LED Q'ty/m	224pcs	IP grade	IP22(IP65/67 available upon request)
Input Voltage	24VDC Constant Voltage	Installation	3M™ double sided tape
Power	21.17w	Working Temperature	-25~+60℃
Cutting length	71.4mm,16LEDs	Max run	4 meters
Strip Width	12mm	Certification	CE, RoHs
Viewing Angle	120°	Warranty	5 years ^①

Order Code	CCT / Color	CRI	Lumen/M ^②
VTW-2016A-224-24-45/20K	 2500-4500K	90+	1250

- Note:
1. Contact Blueview for exact warranty period and police.
 2. Lumen output are measured according to PMS-08, with a tolerance of +/- 5
 3. Standard package: 5m/roll
 4. Pls confirm the power supply is voltage dimmable.

Dimming Curve //

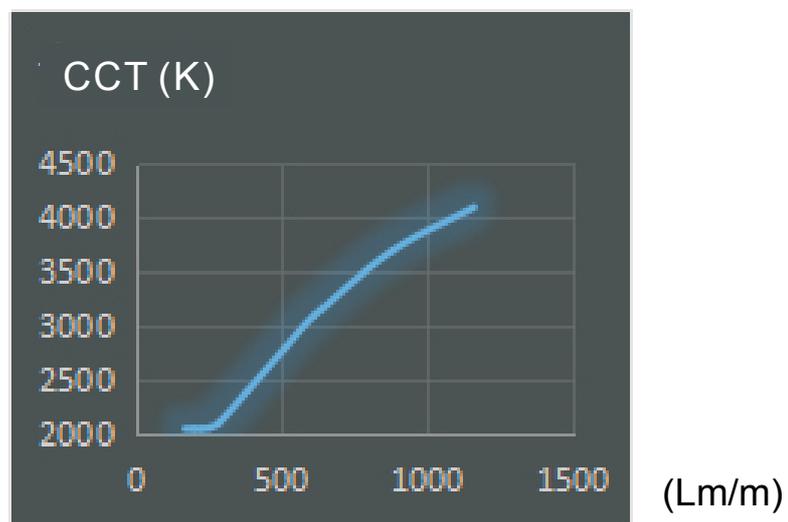


Installation //

Voltage
dimnable
power
supply




VTW Strip

Dimension //

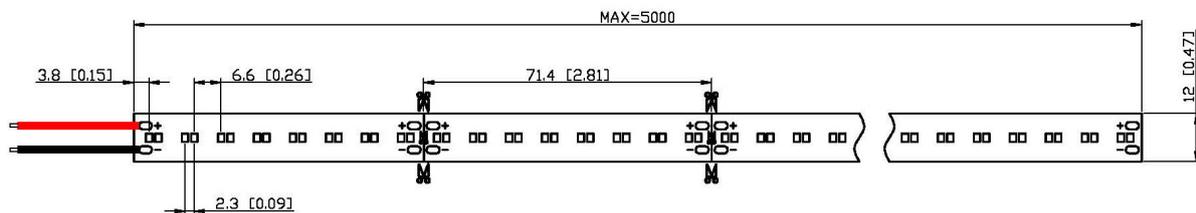

Package //

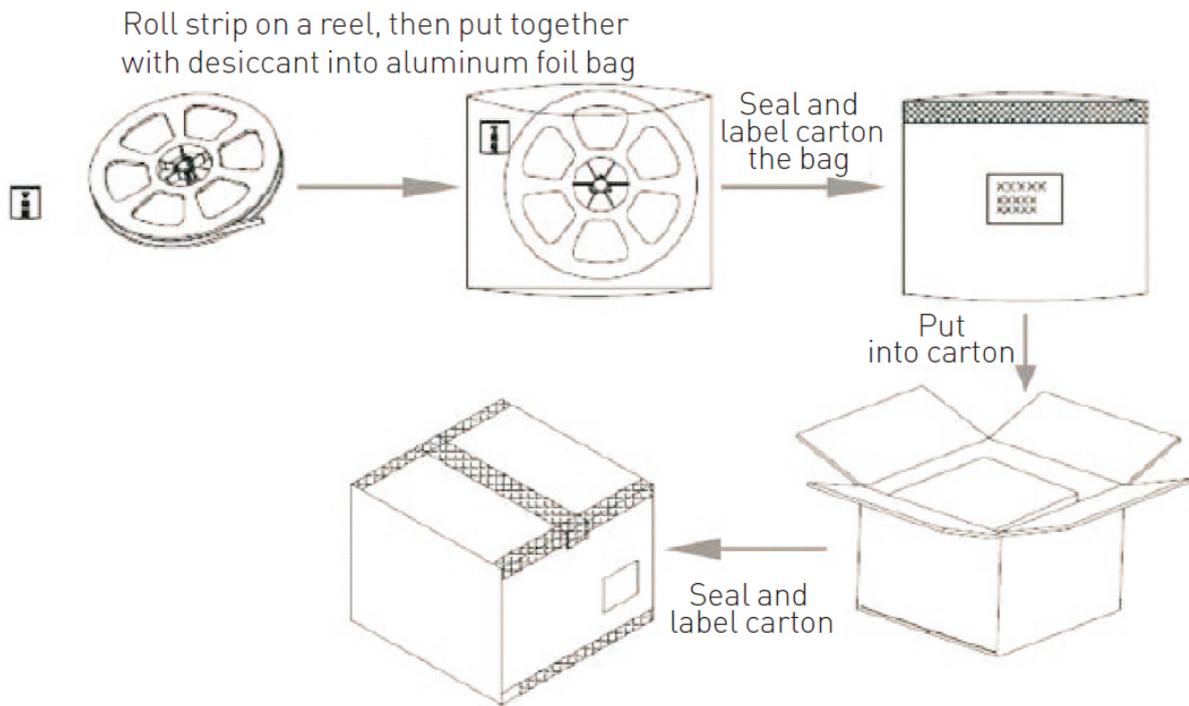

Part No.	Carton Size	Product Size	Qty/Carton	Net weight (NW/kg)	Gross weight (NW/kg)
VTW-2016A-224-24-45/20K	550*400*340mm	5M*10mm	100rolls	18(1±10%)kg	19(1±10%)kg

Notes:

1. Use anti-static sealing bag for inner package, then packed in carton.
2. Above quantity and weight are subject to upon standard package, please take the practical product as standard, when package changed.